

# ACCESSORY SETUP INSTRUCTION

**Before you begin:** Read and understand the instructions before starting any work. Ensure that all parts are ready and that you have all the tools required for assembly.

**Note:** ODES is not responsible for any damage caused by incorrect assembly. ODES recommends that all original parts be assembled by authorized ODES dealers.


Before assembly, park the vehicle on a flat surface, place the transmission gear in the park position (P), and then turn off the ignition switch.

**Shandong ODES Industrial Co., Ltd.** All rights reserved. Reproduction of this document, even in part, and any form of copying are only permitted with the explicit written permission of the copyright owner.

**APPLICABLE TO:** AODES Pathcross 1000 Pro L, AODES Pathcross 1000 Pro S, AODES Pathcross 1000 L, AODES Pathcross 1000 S.

## PARTS LIST:


S/N	PART NAME	PART NUMBER	QTY.	REMARK
1	Handlebar Guard	LEFT: 17005160080	1	
		RIGHT: 17005160090	1	
2	Handlebar Guard Mounting Plate	LEFT: 17005160030	1	
		RIGHT: 17005160040	1	
3	Handlebar Guard Mounting Plate Sleeve	LEFT: 17005160290	1	
		RIGHT: 17005160300	1	
4	Internal Hexagon Flower Head Screw M6x12	03414060124	3	

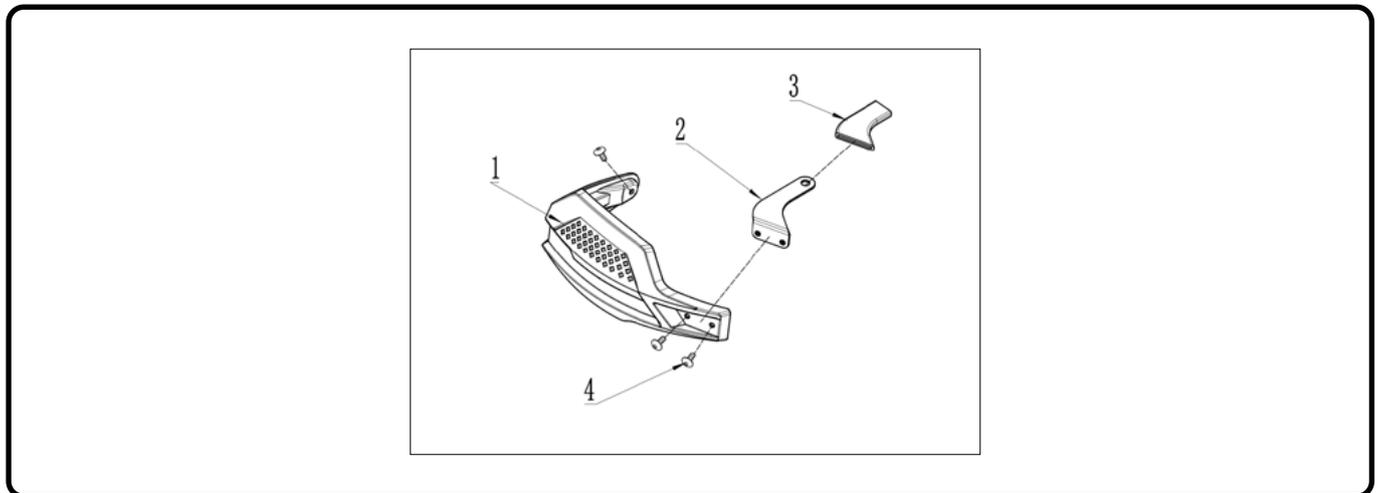


## TOOL LIST:

ITEM	NAME	QTY.	REMARK
1	Air Gun	1	
2	Internal Hexagon Flower Head Wrench T30	1	


## ASSEMBLY AND INSTALLATION

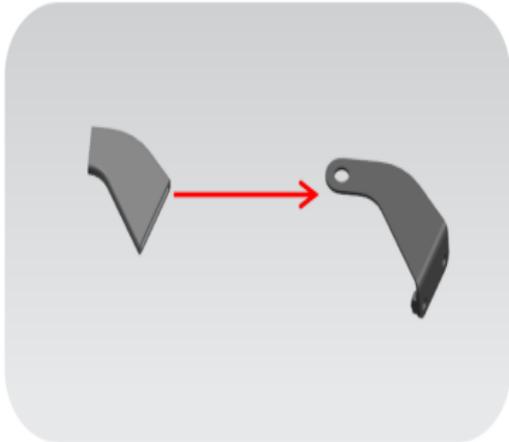


1. Place the handlebar guard mounting plate sleeve onto the handlebar guard mounting plate.

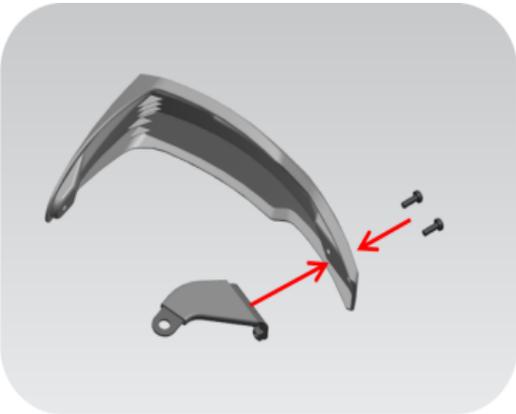


2. Place the handlebar mounting plate in the installation position and secure it using two M6x12 internal hexagon flower head screws.

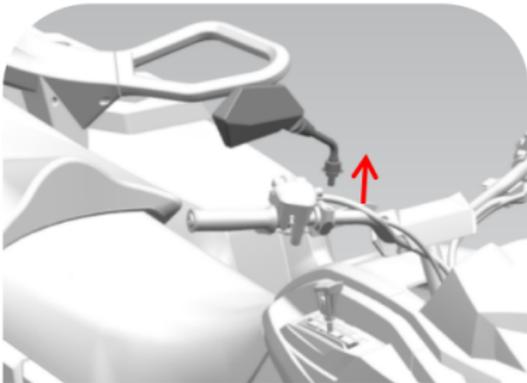

3. Remove the rearview mirror.

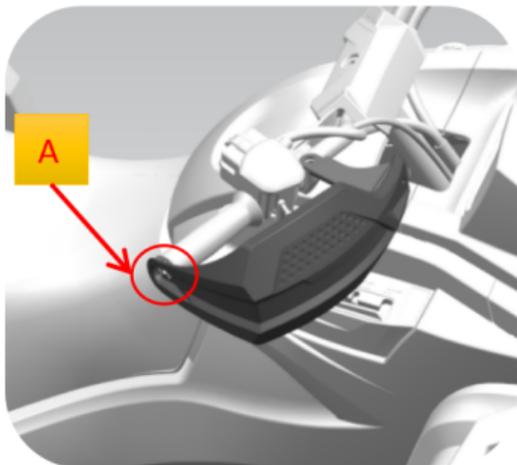

4. Place the handlebar guard into the installation position and screw in the M6x12 black internal hexagon flower head screw (at hole A) for installation.

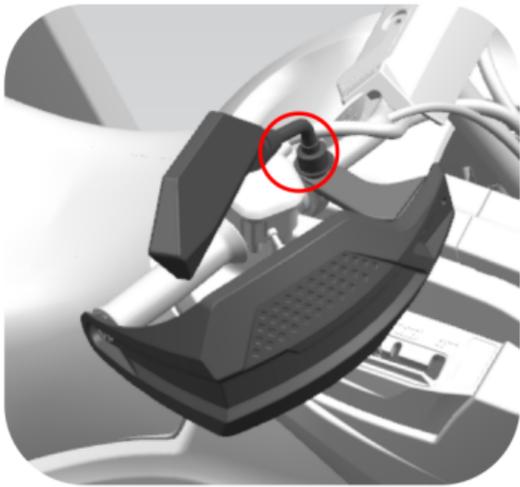

5. Tighten the rearview mirror, and the installation is complete.

### TORQUE VALUE FOR TIGHTENING:

Grade	Torque (N·m)					
	M6	M8	M10	M12	M14	M16
4.6	4 ~ 5	10 ~ 12	20 ~ 25	30 ~ 45	55 ~ 70	90 ~ 110
5.6	5 ~ 7	12 ~ 15	25 ~ 32	45 ~ 55	70 ~ 90	110 ~ 140
6.8	7 ~ 9	17 ~ 23	33 ~ 45	58 ~ 78	93 ~ 124	145 ~ 193
8.8	9 ~ 12	22 ~ 30	45 ~ 59	78 ~ 104	124 ~ 165	193 ~ 257
10.9	13 ~ 16	30 ~ 36	65 ~ 78	110 ~ 130	180 ~ 201	280 ~ 330
12.9	16 ~ 21	38 ~ 51	75 ~ 100	131 ~ 175	209 ~ 278	326 ~ 434